




Features & Benefits

Submersible vortex pump allows for versatile water removal including draining of flat roofs; emptying swimming pools and garden ponds; emptying wastewater from core-hole drilling, concrete cutting and puddles on worksites; drainage and disposal of solids-free wastewater.

- 10m replaceable power cord with plug
- IP68 rated
- Stainless steel rotor shaft
- Integrated circuit breaker
- Mechanical seal
- Continuous operation
- Robust cast aluminum housing
- Removes water down to a level of 2mm



Performance Curve

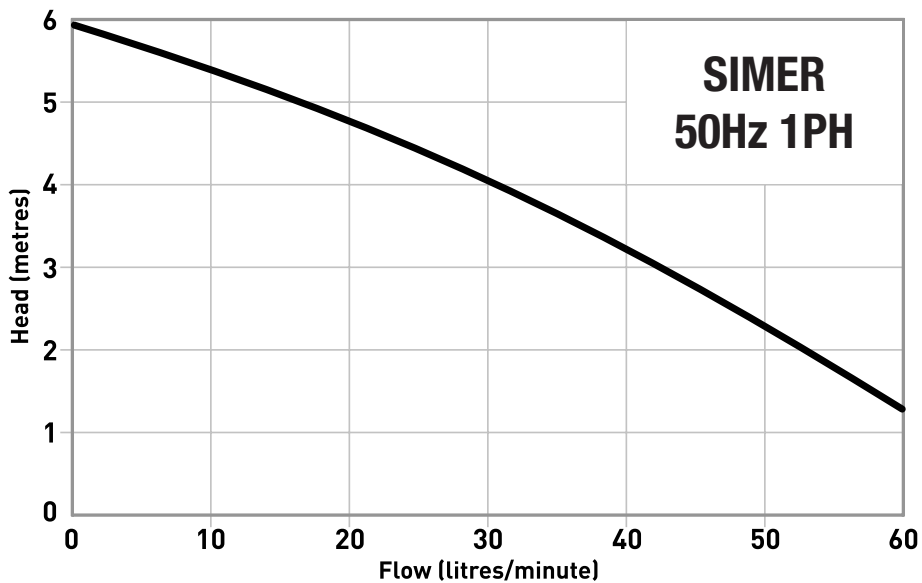

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	0.53	0.40	4	0°C to 40°C	240V	Automatic	32	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS L X W X H (MM)	WEIGHT (KG)
MM	INCH		1M	2M	3M	4M	5M			
32	1-1/4"	62	62	52	42	30	16	5.5	161 x 161 x 267	5





Features & Benefits


Submersible vortex pump for drainage and wastewater applications. Capable of handling solids up to 10mm in diameter.

Suitable for a wide range of applications:

- Basement water removal
- Waster water drainage
- Water transfer
- Sump / effluent handling
- Dewatering
- Fountain circulation
- Sewage handling
- Factory waste water handling



Performance Curve

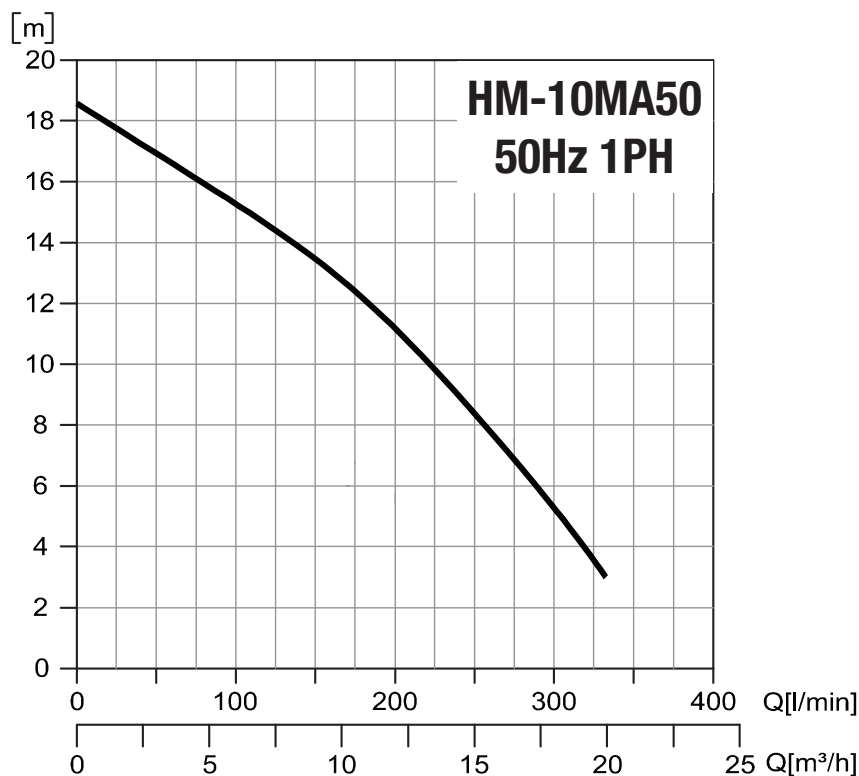

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	0.75	1.0	6	0°C to 40°C	240V	Automatic	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS L X W X H (MM)	WEIGHT (KG)
MM	INCH		4M	7M	10M	15M	17M			
50	2"	325	320	260	220	150	25	17	254 x 180 x 365	16